
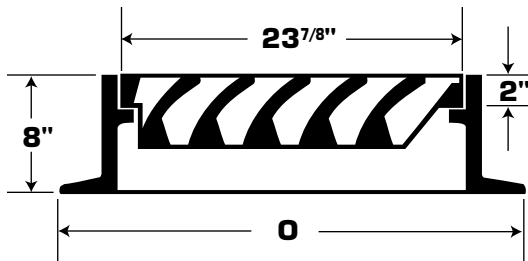


Manhole Castings L-15

MA, ME, NH & VT Standard Catch Basin

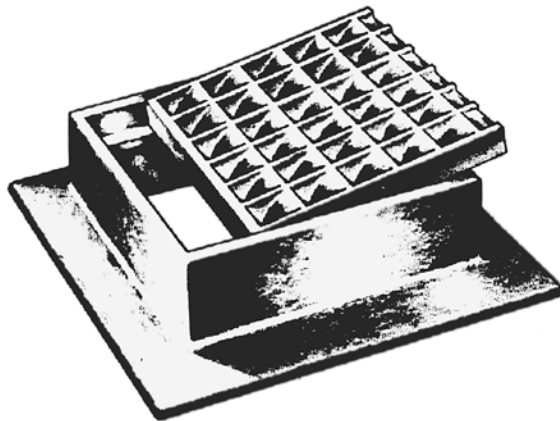

Cascade Catch Basin Frame & Grate

The cascade grate combines the excellent water handling abilities of the “cascade” principal with safety for bicycle and foot traffic. Wherever sloped roads normally dictate parallel bars and bicycle or foot traffic is expected, this “cascade catch basin” should be used.

Specifications:

- Nonrocking grate
- Gray cast iron meets ASTM A48 Class 30
- H-20 load rated
- Frame available in 4", 6" and 8" heights
- Available in 3 or 4 flange style
- The LeBaron cascade grate must be ordered either left or right depending on the direction of flow
- Weights:

	3 Flange	4 Flange
Frame-4"	205 lbs.	235 lbs.
Grate	200 lbs.	200 lbs.
Total	405 lbs.	435 lbs.
Frame-6"	235 lbs.	265 lbs.
Grate	200 lbs.	200 lbs.
Total	435 lbs.	465 lbs.
Frame-8"	265 lbs.	295 lbs.
Grate	200 lbs.	200 lbs.
Total	465 lbs.	495 lbs.

CASTING	DIMENSION (inches)	
	O	
	3 FLG.	4 FLG.
LK125	29" x 32"	32" x 32"
LF 246	29½" x 33"	33" x 33"
LK120	30" x 33"	—
LK121	—	33½" x 33½"

DESCRIPTION	PRODUCT NUMBER
	LEBARON
24" x 4" CB Frame 3 Flg LK125	65171
24" x 4" CB Frame 4 Flg LK125	65173
24" x 6" CB Frame 3 Flg LF246	65175
24" x 6" CB Frame 4 Flg LF246	65177
24" x 8" CB Frame 3 Flg LK120	65264
24" x 8" CB Frame 4 Flg LK121	65267
Cascade Grate OR L24SG14-R	65240
Cascade Grate OL L24SG14-L	65241
Cascade Grate L24SG18 MDOT	65242